1993 EDITORIAL INDEX

◀ CAREER CONCERNS ▶

- The challenges of continuing development (June, p. 177)
- Alternative job-search methods (August, p. 185)
- New products, profits top 1994 priorities (December, p. 31)

◀ COMMERCIAL ▶

- Device suppliers connect with wireless ventures (February, p. 31)
- Intelligent-vehicle market moves into the fast lane (June, p. 42)
- Commercial transition challenges industry (July, p. 33)
- Four firms dominate global cellular-equipment market (August, p. 46)
- Military suppliers go on commercial offensive (September, p. 31)
- Vendor picture brightens in wireless cable television (September, p. 42)
- IVHS takes the high road (December, p. 39)

◀ COMMUNICATIONS ▶

- Minimize losses in land-mobile communications (January, p. 105)
- Is QUALCOMM winning the CDMA/TDMA battle? (March, p. 41)
- Wireless markets eclipse expectations (April, p. 33)
- Understand the basics of spread-spectrum communications (May, p. 149)
- Use Fourier transforms to model spread-spectrum transmitters (June, p. 94)
- UHF receiver design reduces current consumption (June, p. 119)
- Model propagation effects in spread-spectrum systems (July, p. 98)
- Teleport growth aims at wireless markets (August, p. 32)
- Georgia Tech expands non-military research (August, p. 43)
- Assay quadrature modulators for PCS applications, Part 1 (August, p. 90)
- Examples illustrate spread-spectrum modeling techniques (August, p. 127)
- Minimize BER in microwave COMINT receivers (September, p. 68)
- Assay quadrature modulators for PCS applications, Part 2 (September, p. 90)
- FCC sets PCS rules, but questions remain (October, p. 33)
- Codes improve multiple-access communications (December, p. 157)

◀ COMPONENTS ▶

- Technique enhances the performance of PLL synthesizers (January, p. 59)
- Thermal-compensation circuits provide a three-point fit (January, p. 81)
- Digital attenuator offers multi-octave linear performance (January, p. 89)
- Signal-processing components target cellular market (February Cover, p. 111)
- Semiconductor giant enters RF market with four PLLs (February, p. 121)
- Linear amp IC aids UHF systems from 0.8 to 1.0 GHz (February, p. 126)
- Filter supplier breaks loose with commercial designs (February, p. 138)
- Broadside-coupled structure features easy MIC integration (March, p. 88)
- HEMT devices fuel 26-to-40-GHz GaAs MMIC amplifier (March, p. 168)
- Chip collection aims at 1.9-GHz DECT applications (March, p. 173)
- Three-way power divider/combiner links 0.2 to 18 GHz (March, p. 174)
- C-band amplifier delivers 100 W from 4.4 to 5.0 GHz (March, p. 180)
- Build absorptive all-harmonic waveguide filters (April, p. 78)
- Lumped elements characterize Q in dielectric resonators (April, p. 89)
- Transmission lines accurately model autotransformers (April, p. 101)
- Multichip modules gain ground at higher frequencies (May, p. 49)
- Learn to fold the Wilkinson hybrid divider (May, p. 163)
- Build broadband multilayer multiplexers (May, p. 181)
- Large-scale dithering enhances ADC dynamic range (May, p. 192)
- Relays tender true attenuation from DC to 3 GHz (May, p. 222)
- Low-cost PLL synthesizer speeds wireless designs (May, p. 225)
- Integrated circuits accelerate design of wireless radios (May, p. 237)

1993 EDITORIAL INDEX

◀ CAREER CONCERNS ▶

- The challenges of continuing development (June, p. 177)
- Alternative job-search methods (August, p. 185)
- New products, profits top 1994 priorities (December, p. 31)

◀ COMMERCIAL ▶

- Device suppliers connect with wireless ventures (February, p. 31)
- Intelligent-vehicle market moves into the fast lane (June, p. 42)
- Commercial transition challenges industry (July, p. 33)
- Four firms dominate global cellular-equipment market (August, p. 46)
- Military suppliers go on commercial offensive (September, p. 31)
- Vendor picture brightens in wireless cable television (September, p. 42)
- IVHS takes the high road (December, p. 39)

◀ COMMUNICATIONS ▶

- Minimize losses in land-mobile communications (January, p. 105)
- Is QUALCOMM winning the CDMA/TDMA battle? (March, p. 41)
- Wireless markets eclipse expectations (April, p. 33)
- Understand the basics of spread-spectrum communications (May, p. 149)
- Use Fourier transforms to model spread-spectrum transmitters (June, p. 94)
- UHF receiver design reduces current consumption (June, p. 119)
- Model propagation effects in spread-spectrum systems (July, p. 98)
- Teleport growth aims at wireless markets (August, p. 32)
- Georgia Tech expands non-military research (August, p. 43)
- Assay quadrature modulators for PCS applications, Part 1 (August, p. 90)
- Examples illustrate spread-spectrum modeling techniques (August, p. 127)
- Minimize BER in microwave COMINT receivers (September, p. 68)
- Assay quadrature modulators for PCS applications, Part 2 (September, p. 90)
- FCC sets PCS rules, but questions remain (October, p. 33)
- Codes improve multiple-access communications (December, p. 157)

◀ COMPONENTS ▶

- Technique enhances the performance of PLL synthesizers (January, p. 59)
- Thermal-compensation circuits provide a three-point fit (January, p. 81)
- Digital attenuator offers multi-octave linear performance (January, p. 89)
- Signal-processing components target cellular market (February Cover, p. 111)
- Semiconductor giant enters RF market with four PLLs (February, p. 121)
- Linear amp IC aids UHF systems from 0.8 to 1.0 GHz (February, p. 126)
- Filter supplier breaks loose with commercial designs (February, p. 138)
- Broadside-coupled structure features easy MIC integration (March, p. 88)
- HEMT devices fuel 26-to-40-GHz GaAs MMIC amplifier (March, p. 168)
- Chip collection aims at 1.9-GHz DECT applications (March, p. 173)
- Three-way power divider/combiner links 0.2 to 18 GHz (March, p. 174)
- C-band amplifier delivers 100 W from 4.4 to 5.0 GHz (March, p. 180)
- Build absorptive all-harmonic waveguide filters (April, p. 78)
- Lumped elements characterize Q in dielectric resonators (April, p. 89)
- Transmission lines accurately model autotransformers (April, p. 101)
- Multichip modules gain ground at higher frequencies (May, p. 49)
- Learn to fold the Wilkinson hybrid divider (May, p. 163)
- Build broadband multilayer multiplexers (May, p. 181)
- Large-scale dithering enhances ADC dynamic range (May, p. 192)
- Relays tender true attenuation from DC to 3 GHz (May, p. 222)
- Low-cost PLL synthesizer speeds wireless designs (May, p. 225)
- Integrated circuits accelerate design of wireless radios (May, p. 237)

• Amplifier/switch provides boost to WLANs/PCNs (May, p. 238)
• DSP techniques aid arithmetic synthesizer (June Cover, p. 147)
• Supplier's ICs target wireless communications (June, p. 154)
• Flexible cables cut measurement system costs (June, p. 156)
• Digital modulator controls levels from 18 to 40 GHz (June, p. 159)
• Digital phase shifters serve as frequency translators (July, p. 61)
• Loop-filter design dominates PLL settling performance (July, p. 74)
• Phase-locked DRO uses a sampling phase detector (July, p. 103)
• Design DDS systems and digitize IFs with DACs/ADCs (August, p. 111)
• Patch antenna integrates low-noise amp (August, p. 121)
• ICs simplify the design of digital communications links (August, p. 141)
• DROs deliver stable signals from 5 to 18 GHz (August, p. 153)
• Check accuracy of temperature-dependent equivalent circuits (September, p. 91)
• Lumped-element networks compose wide-bandwidth balun (September, p. 119)
• Sliding cube tunes microstrip transmission lines (September, p. 137)
• Applications guide the selection of crystal oscillators (September, p. 144)
• Four-channel mixer-preamps translate 18 GHz (September, p. 170)
• Directional coupler monitors cell-site transmissions (September, p. 172)
• Dual-frequency antenna aids WLAN applications (September, p. 174)
• Design broadband passive components with ferrites (October, p. 81)
• Active hybrid offers multi-octave bandwidth performance (October, p. 88)
• Attenuator and amplifier ICs aid digital systems (October, p. 92)
• Broadband MIC equalizes TWTA output response (October, p. 102)
• Miniature YIG sources are phase-locked (October Cover, p. 108)
• Directional coupler handles high power levels to 6 GHz (October, p. 118)
• Monolithic GaAs HBTs power high-speed logamps (October, p. 122)
• PHEMT amplifier minimizes noise from 1.5 to 8.0 GHz (October, p. 126)
• Design microwave oscillators with stability circles (November, p. 95)
• LNA/mixer ICs ease wireless receiver design (November, p. 99)
• HEMT tradeoffs shorten LNA design time (November, p. 104)
• Directional couplers offer flat sensitivity (November, p. 128)
• Process IF signals with amplifiers and quad demodulators (December, p. 109)
• VCOs and DTOs settle quickly in modern systems (December Cover, p. 175)
• Miniature VCO tunes 2.4-GHz WLAN band (December, p. 184)
• MMIC chip set integrates WLAN front end (December, p. 188)

◀ COMPUTER-AIDED ENGINEERING ▶

• Design package speeds analysis of transmission lines (January, p. 137)
• Shareware tackles system design and analysis (January, p. 138)
• Software permits semiconductor-device thermal modeling (February, p. 63)
• Software models point-to-point digital receivers (February, p. 129)
• Math tool kit quickly tames complex equations (February, p. 137)
• Use inexpensive SPICE files for S-parameter extraction (May, p. 210)
• EM design tool extends power of circuit simulators (May Cover, p. 217)
• Simulation software blends analog and digital circuits (May, p. 228)
• CAE simulators open Windows to PC operators (May, p. 233)
• Schematic-capture software assists simulation tools (May, p. 236)
• Reliably extract MESFET and HEMT parameters (June, p. 131)
• Software tracks terrain effects on transmitters (June, p. 141)
• SPICE package simulates mixed-signal circuits (June, p. 143)
• Software speeds analog designs (June, p. 144)
• Software aids selection of microwave mixers (July, p. 128)
• Program computes mutual coupling in slot arrays (August, p. 105)
• Personal-computer program masters active filters (August, p. 154)
• Design tools tame phase-locked loops (August, p. 156)
• Software previews lumped-element filter performance (October, p. 115)
• Simulate oscillator phase noise (November, p. 64)
• Software improves flexibility of SPICE analysis (November, p. 73)
• Models extend SPICE simulation to gigahertz frequencies (November, p. 80)
• Technique provides simple analysis of PLL functions (November, p. 89)
• SPICE simulator speeds microwave and RF analysis (November Cover, p. 111)
• CAE tools assist savvy RF designers (November, p. 116)
• Math program solves scores of applications (November, p. 122)
• CAE package streamlines filter design (November, p. 123)

1993 EDITORIAL INDEX

• Linear simulator opens Windows to circuit designers (November, p. 126)
• Software simulates mixed-signal circuits (December, p. 164)
• Graphics pack provides potent digital filtering (December, p. 166)
• EDA software speeds CDMA design (December, p. 168)
• Package predicts EMI and crosstalk (December, p. 172)

◀ CONFERENCES ▶

• Solid-state circuits strive for speed and efficiency (January, p. 40)
• RF conference concentrates on practical designs (February, p. 43)
• Hybrid meeting aims at practical circuit solutions (March, p. 44)
• Reviewing highlights from the first WIRELESS symposium (March, p. 123)
• Wireless products aim at emerging commercial arenas (March, p. 138)
• Measurement group analyzes packaging and interconnections (May, p. 43)
• 1993 International Microwave Symposium (May, p. 68)
• ARFTG conference addresses automation in microwave testing (August, p. 51)
• 23rd European Microwave Conference (August, p. 72)
• Microwave Workshops and Exhibitions '93 (August, p. 88)
• RF Expo presents digital and wireless systems (September, p. 46)
• GaAs IC symposium focuses on the needs of users (September, p. 51)
• Tubes and transistors shine at IEDM (December, p. 47)
• Wireless papers point to progress (December, p. 69)
• Wireless products make global headway (December, p. 76)

◀ CROSSTALK ▶

• Larry Potter, sales and marketing manager of Hewlett-Packard Co.'s Test and Measurement Organization (January, p. 43)
• Russ Johnsen, director of wireless communications at National Semiconductor (February, p. 47)
• Dennis R. Clark, president of Integrated Microwave (March, p. 49)
• Carl Schraufnagl, vice president of marketing for KDI/triangle Electronics, Inc. (April, p. 43)
• Allen R. "Mike" Frischkorn Jr., president of the Telecommunications Industry Association (May, p. 53)
• Ron Bub, president and CEO of StratEdge Corp. (June, p. 49)
• Paul Graham, president of Dynatech Microwave Technology (July, p. 45)
• Donald F. Bogue, president and CEO of Giga-tronics Inc. (August, p. 57)
• Stephen Toma, vice president of operations at Astrolab, Inc. (September, p. 53)
• Ray Gleason, worldwide marketing director at GEC Plessey Semiconductors, Inc. (October, p. 45)

Quality & Dependability

Imperative in the company

Imperative in the component

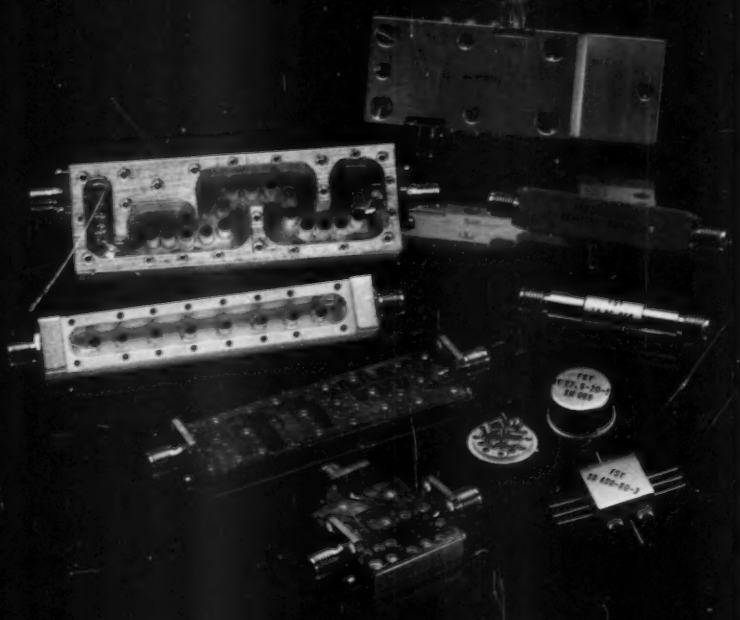

AND AT THE RIGHT PRICE.

FSY Microwave, Inc. offers a complete line of HIGH PERFORMANCE RF AND MICROWAVE FILTERS & MULTIPLEXERS covering the DC to 40 GHz frequency range in both standard and custom configurations. For the past decade, FSY Microwave, Inc. has specialized in only Filters & Multiplexers for commercial, military, and space applications. For QUALITY AND DEPENDABILITY AT THE RIGHT PRICE, call FSY Microwave, Inc. at (301) 294-8950 or FAX us your requirements directly at (301) 294-3007

FSY MICROWAVE, Inc.

1055 First Street • Rockville, MD 20850

CIRCLE NO. 443

1993 EDITORIAL INDEX

• Joseph S. Barrera, executive vice president and chief operating officer of Samsung Microwave Semiconductor, Inc. (November, p. 47)
• Herman C. Okean, co-founder and vice president of LNR Communications, Inc., Government Systems Div. (December, p. 53)

◀ DEFENSE ELECTRONICS ▶

• Defense conversion is still an on-going "work in progress" (May, p. 33)
• Dual-use technologies produce mixed signals (June, p. 33)
• Forecast targets opportunities in defense electronics (November, p. 33)

◀ DEVICES ▶

• Optimization process models active microwave devices (February, p. 95)
• Silicon and GaAs beamless diodes replace beam-leads (March, p. 176)
• Silicon MOSFETs power Gilbert-cell mixers (April, p. 59)
• PIN diodes are supplied as universal chips (April, p. 116)
• Cost-effective test fixtures speed tests to 3 GHz (May, p. 239)
• Fixture assists discrete-device characterization (June, p. 114)
• New applications fuel GaAs market in Europe (October, p. 41)
• Databook guides specifiers to GaAs information (October, p. 120)
• OEMs shift from discretes to MMICs (November, p. 41)
• RF semiconductors drive next-generation PCS (December, p. 83)
• PIN diodes offer high-power, HF-band switching (December, p. 119)
• Control bipolar-transistor output pulse length (December, p. 143)

◀ INTERNATIONAL ▶

• Offshore markets gain in size, competitiveness (March, p. 33)

◀ MATERIALS ▶

• Design microstrip components with a dielectric cover (February, p. 71)
• Process delivers inexpensive, low-noise performance (February, p. 83)
• Thick-film package holds microwave ICs (May, p. 201)
• AlN substrates yield high-power compact switches (June, p. 69)
• Circuit-board materials gear for wireless use (August Cover, p. 147)
• Fabrication process combines low cost and high reliability (October, p. 61)

◀ SUPERCONDUCTORS ▶

• Software models HTSC microstrip and coplanar lines (July, p. 118)

COMPEX CORP NOW offers

48 hr. guaranteed delivery on

Microwave CSA Ceramic Capacitors

from **50** to **500** CHIPS
(SINGLE LAYER)

Dimensions quaranteed not to exceed 10, 20 and 30 in width

- 10 mils from .1 to 120 pF
- 20 mil from .08 to 100 pF
- 30 mil from .1 to 220 pF
- Gold terminations

Call for a listing of part numbers

COMPEX CORP
ASK FOR CAROL FOR IMMEDIATE SERVICE
Taunton Professional Parke
238 Taunton Blvd., Medford, NJ 08055

VISIT US AT BOOTH #501 AT
THE WIRELESS SYMPOSIUM & EXHIBITION
CIRCLE NO. 421

Moving?

1. For FASTEST service you must attach old mailing label in space below.

If mailing label is not available print your old company name and address in this box.

Please allow 6 weeks for change to take effect

2. Print your NEW business address here

NAME _____ TITLE _____
COMPANY _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____

3. Mail to:
Microwaves & RF
Penton Publishing
1100 Superior Ave.
Cleveland, OH 44114

• Superconducting circuits make practical strides (July Cover, p. 123)

◀ SYSTEMS & SUBSYSTEMS ▶

• Synthesizer designs minimize phase noise in cellular systems (January, p. 69)
• Automatic system quickly measures satcom channels (January, p. 98)
• Acousto-optics pull delays to longer lengths (January, p. 117)
• Simple technique checks errors in data transmission (February, p. 89)
• Video receiver serves ESM applications (February, p. 103)
• Synthesizers push performance levels for satcom systems (February, p. 133)
• Digital technology improves radar pulse compression (March, p. 64)
• Equations determine interference patterns between antennas (March, p. 73)
• Monopole array provides VHF dual-frequency operation (March, p. 83)
• Improve rotary-joint reliability for global ATC (March, p. 105)
• Compute flat-zone lens illumination and detection (March, p. 108)
• Antennas make wireless EM connections (March, p. 118)
• Integrated IFM speeds design of ESM systems (March, p. 178)
• System speeds compliance with MIL-STD-2000 (May, p. 187)
• Low-cost receiver chips pull in GPS signals (May, p. 230)
• Digital chirp generator suits space applications (June, p. 83)
• Use geometry to analyze multipath signals (July, p. 87)
• Single-module synthesizer serves VSAT applications (July, p. 112)
• System acquires and analyzes 200-MHz bandwidth (July, p. 130)
• DDS drives 1-kW command transmitter (September, p. 83)
• Flat reflectors influence antenna sidelobe performance (September, p. 113)
• Integrated transceiver scans W-band (September Cover, p. 164)
• Miniature hybrid MICs support MMIC subsystem design (October, p. 71)
• Phase-shift keying serves direct-sequence applications (December, p. 89)
• Understand the mathematics of phase noise (December, p. 97)
• Spiral microstrip antenna suits EW/ECM systems (December, p. 147)

◀ TEST & MEASUREMENT ▶

• Emerging applications propel microwave test markets (January, p. 29)
• Commercial parts form compact PC spectrum analyzer (January, p. 111)
• Test peak-to-average power of vector-modulated signals (January, p. 123)
• VXI power meter snares waveforms for ATE systems (January Cover, p. 131)
• DSP analyzer grabs high-speed waveforms to 10 MHz (February, p. 134)
• Technique measures accuracy of Allan-Variance systems (March, p. 99)
• Increase measurement speed by examining test parameters (March, p. 113)
• Low-cost wafer probe scales 100-GHz summit (March Cover, p. 162)
• Signal analyzer facilitates TDMA system design (April, p. 65)
• Test setup gauges externally-induced transmitter IM (April, p. 95)
• Noise signals are versatile system testers (April Cover, p. 109)
• Test system characterizes interconnections (April, p. 118)
• Scope captures 8 GSamples/s across 2 GHz (April, p. 120)
• VXI multiplexer switches aid RF test setups (May, p. 131)
• Check group delay and amplitude of microwave radios (May, p. 141)
• Software converts PC into a radio monitor system (May, p. 173)
• VXI generator synthesizes 10 MHz to 20 GHz (May, p. 224)
• Tricorder easily treks through CATV measurements (May, p. 232)
• Probe design extends on-wafer testing to 120 GHz (June, p. 104)
• Improve manufacturing quality with just-in-time techniques (June, p. 111)
• Program de-embeds wafer-probed data (June, p. 136)
• Tuner takes data under PC control (June, p. 140)
• Technique measures gain of different antenna polarizations (July, p. 94)
• Software transforms PC into antenna-analysis workstation (July, p. 132)
• Synthesizers and sweepers reach 20 GHz (August, p. 158)
• Decode dynamic range in time/frequency-domain analyzers (September, p. 102)
• Transmission-line device delivers EMC measurements (September, p. 155)
• Optical signal processing arms spectrum analyzers (September, p. 161)
• Test set eases phase-noise measurements (October, p. 112)
• Plug-in arms scope for 4-GHz measurements (October, p. 124)
• Phase-aligned carriers improve IMD measurements (December, p. 103)
• Precisely predict propagation loss between microcells (December, p. 131)
• Increase test productivity for EW antennas (December, Zp. 152)